


GDI-5



Description	Specification
Rig Name / Model	GDI-5/ LANCO 1000 HP mounted on 4 Axle LANCO trailer unit.
Mast Height	Model: DSII 122 X 450 Klbs Height: 122 ft. Telescoping Mast Max wind resistant: 60 Knots
Hook Load Capacity	Max Static Load: 450 KLbs
Crown Block	DSI
Rig Substructure	Model: DSII Hydraulically Telescoping 19'-425 KLbs. Height 22' in extended position. BOP hoist and Trolley
Set back capacity	300 KLbs
Hook & Block Assembly	Mc Kissick, 250 Ton Capacity . RJ style 868, drilling line: 1-1/8"
Rotary Table	Cameron/Letourman L-275, 27 1/2" Max RPM:120
Draw works	LANCO 750 SD, 1000 HP, 71,500 HP
Brakes Mechanism	Lb single line pull Drum break system with Eaton water circulating auxiliary Break
Mud Pump	EWECO E1100 Triplex, 1100 HP, Working pressure: 5000 psi, Prime mover: Detroit diesel MTU 16V2000(1205 HP)
Power Package	Detroit Diesel 450 KW. S60 x 2
Mud System	RRC 1250 BBL + 350 BBL Water Tank.
Shale Shakers	Single Deck MONGOOSE PT Linear & Dual Motion. Capacity 1200 GPM.
Desander	N/A
Poor boy Degasser	(AXON) Church Energy (AXON)
Degasser	Brandt DG 12. Capacity 500 GPM
BOP Equipment	(AXON) Church Energy Annular BOP: 11"x5 M (AXON) Church Energy Double RAM Type U BOP: 11" x10 M (AXON) Church Energy 7 station BOP control unit.



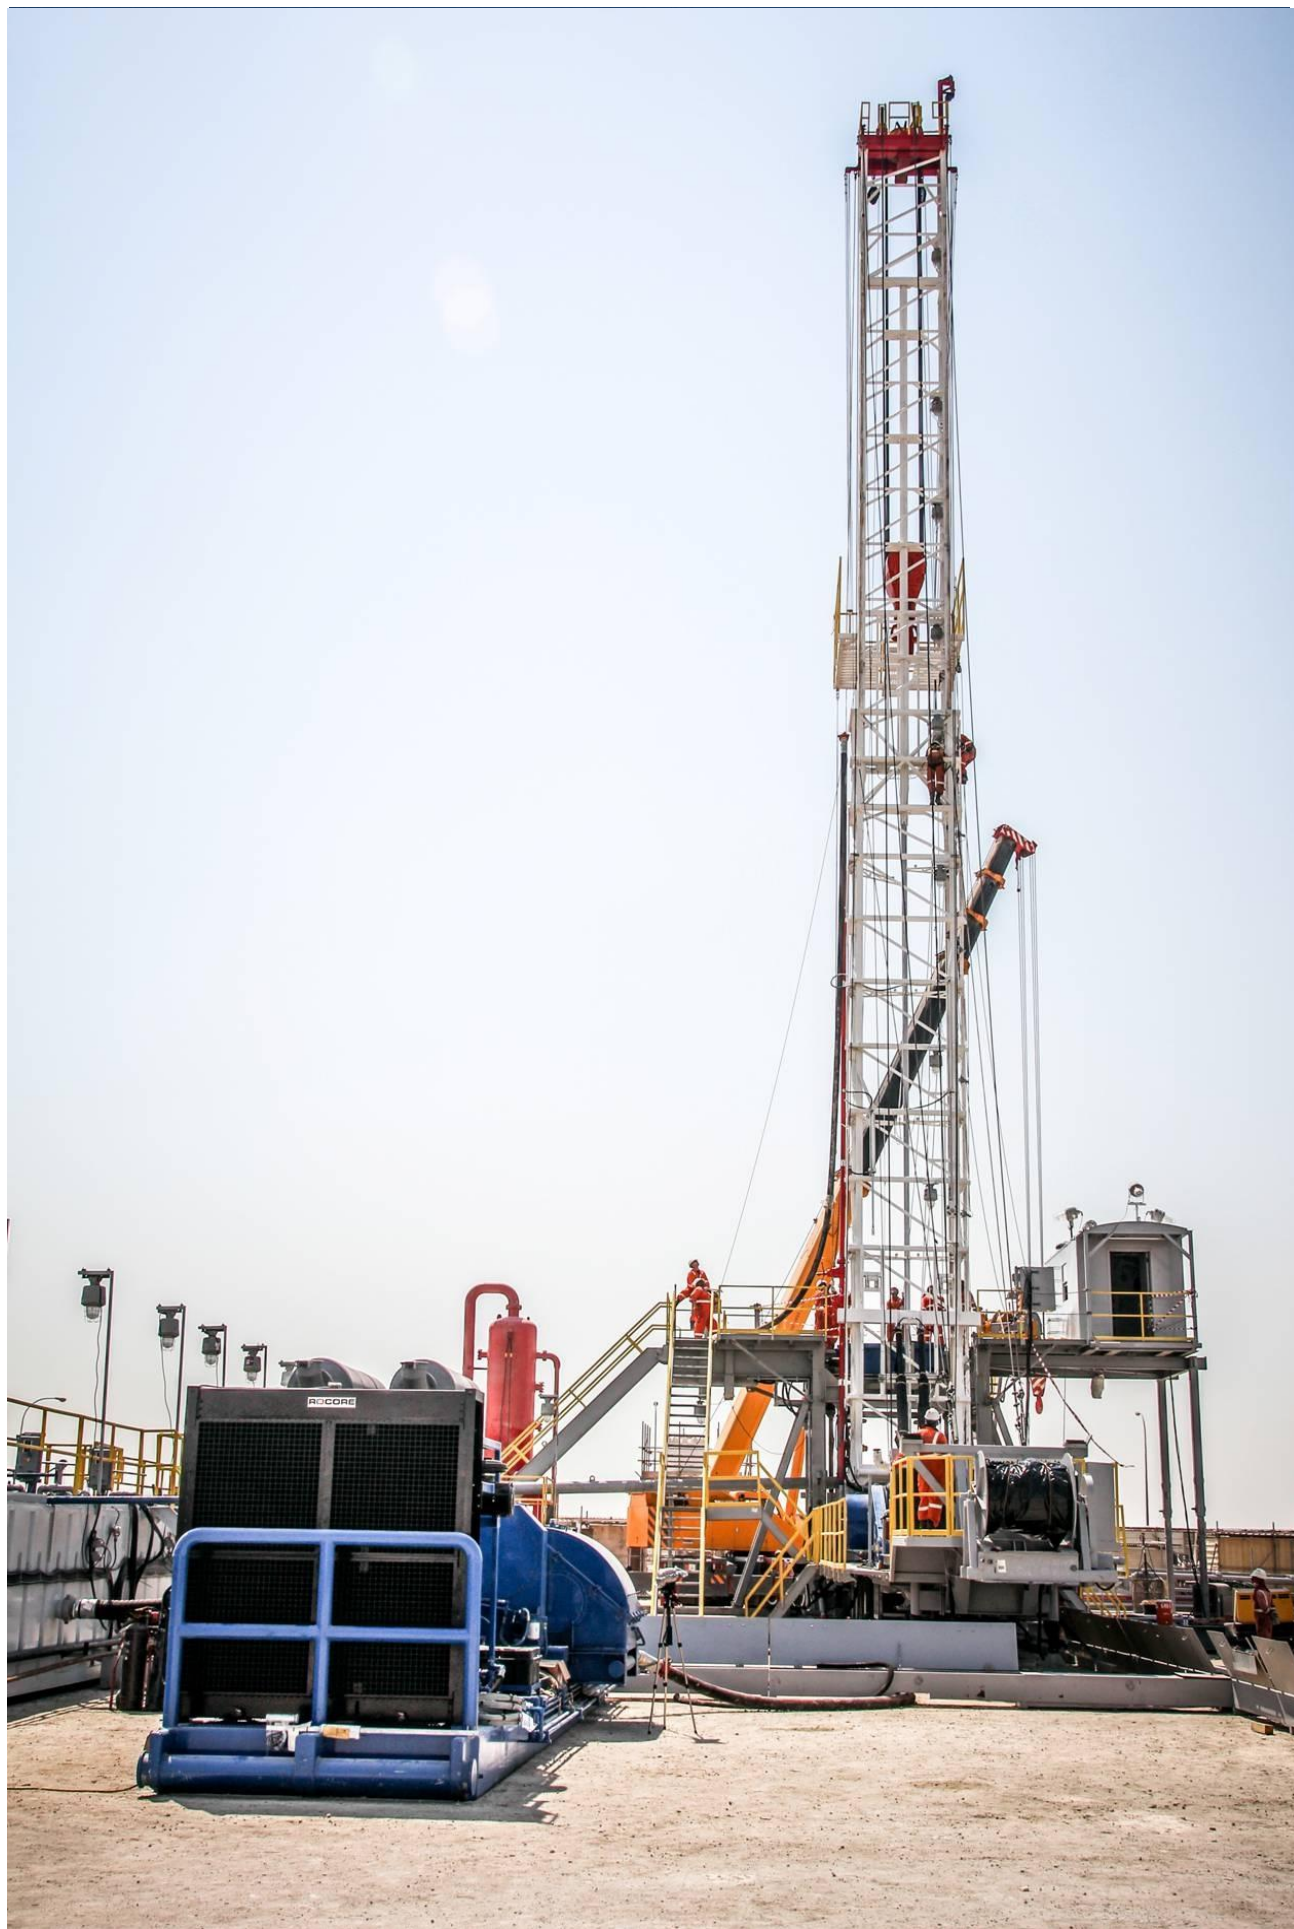